

Round Type , Blinking LED lamp

BL-L314-B-S3

Features:

- 3mm Round Type LED Lamps, candle random blinking
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens are available.
- IC compatible /Low current capability.
- RoHs Compliance



■ Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=50mA)

Part Number	Chip			Lens Type	Pulse Rate(Hz) VDD=5V (Hz)			Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2 (deg)
	Emitted Color	Material	λ _P (nm)		Min	Typ	Max	Min.	Typ.	
BL-L314SRC-B-S3	Hi Red	AlGaAs,SH	660	Water Clear	-	-	-	50	220	30
BL-L314LRC-B-S3	Super Red	AlGaAs,DH	660		-	-	-	200	500	
BL-L314URC-B-S3	Ultra Red	AlGaAs,DDH	660		-	-	-	500	900	
BL-L314UEC-B-S3	Ultra Red	AlGaInP	630		-	-	-	900	1800	
BL-L314UYC-B-S3	Ultra Yellow	AlGaInP	590		-	-	-	900	2000	
BL-L314UGC-B-S3	Ultra Green	AlGaInP	574		-	-	-	220	600	
BL-L314PGC-B-S3	Ultra Pure Green	InGaN	525		-	-	-	1200	3000	
BL-L314BGC-B-S3	Ultra Bluish Green	InGaN	505		-	-	-	900	2800	
BL-L314UBC-B-S3	Ultra Blue	InGaN	470		-	-	-	500	1400	
BL-L314VC-B-S3	UV	InGaN	405		-	-	-	100	150	
BL-L314UWC-B-S3	Ultra White	InGaN	/		-	-	-	900	2000	
BL-L314UW2C-B-S3	Ultra Warm White	InGaN	/		-	-	-	900	2000	


■ Absolute maximum ratings (Ta=25°C)

Parameter	SR	LR	UR	UE	UY	UG	PG	BG	UB	V	UW	Unit
Forward Current I _F	25	25	25	30	30	30	30	30	30	30	30	mA
Power Dissipation P _d	60	60	60	65	65	75	110	110	120	120	120	mW
Reverse Voltage V _R	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	mA
Operation Temperature T _{OPR}	-40 to +80											°C
Storage Temperature T _{STG}	-40 to +85											°C
Lead Soldering Temperature TSOL	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)											°C

Round Type , Blinking LED lamp

BL-L314-B-S3

■ Package configuration & Internal circuit diagram

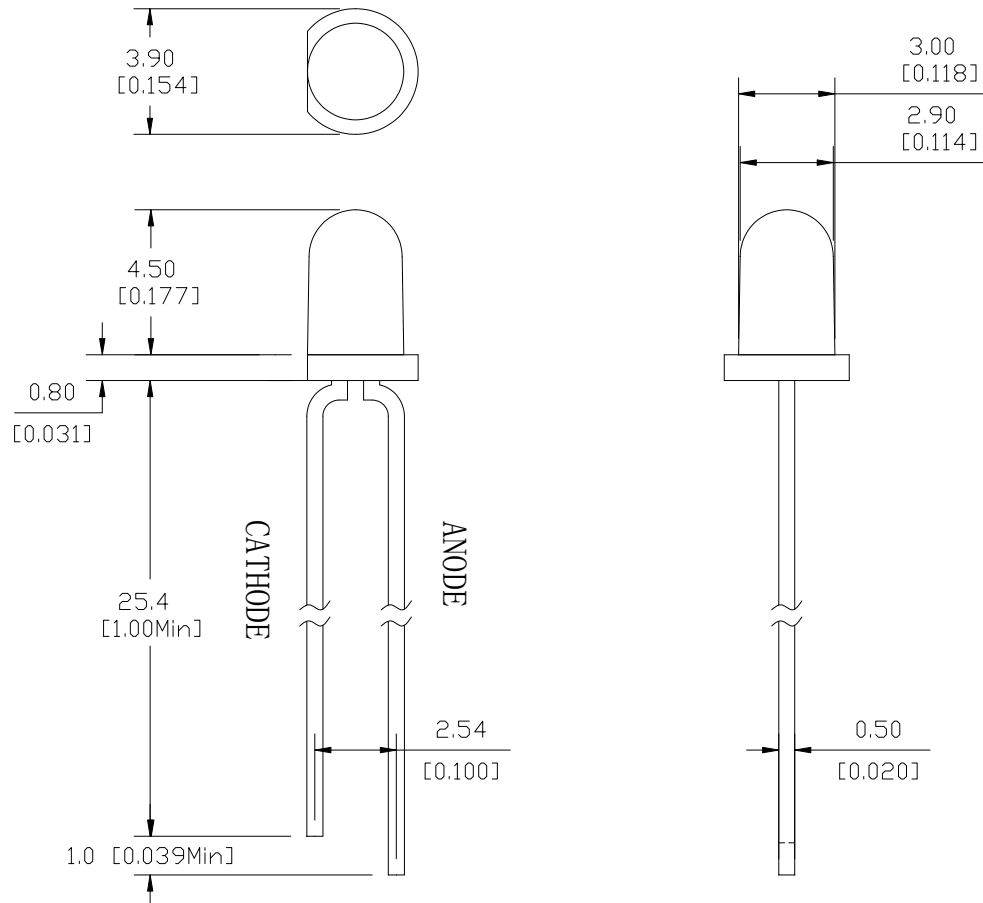


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


Round Type , Blinking LED lamp

BL-L314-B-S3


■ Typical electrical-optical characteristics curves:

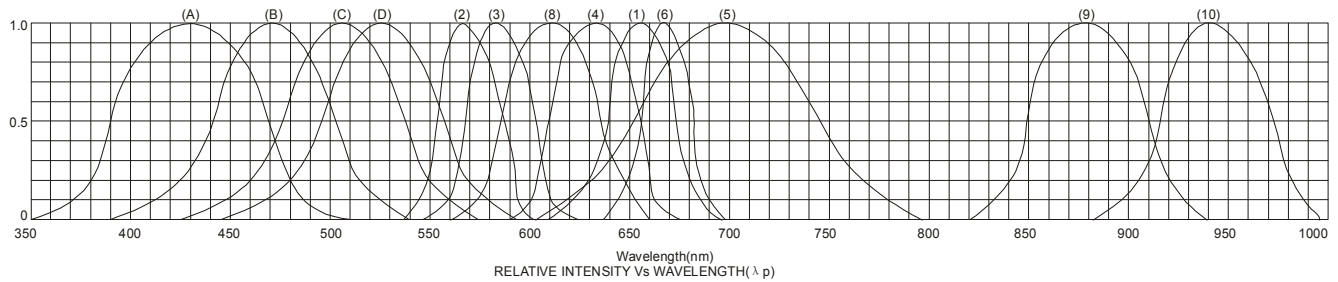


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

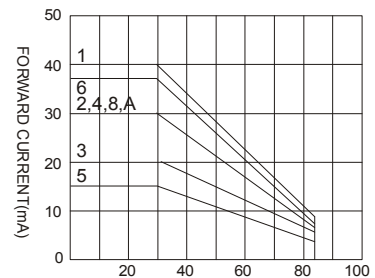

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

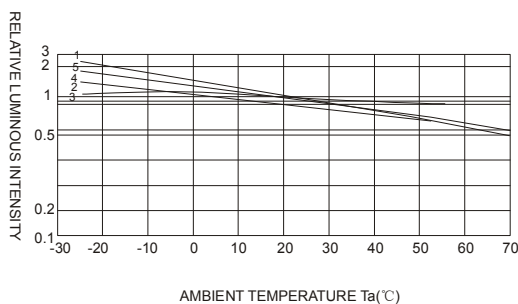

AMBIENT TEMPERATURE Ta(°C)

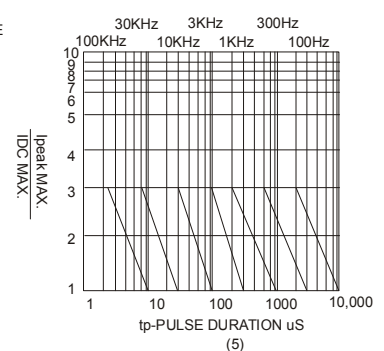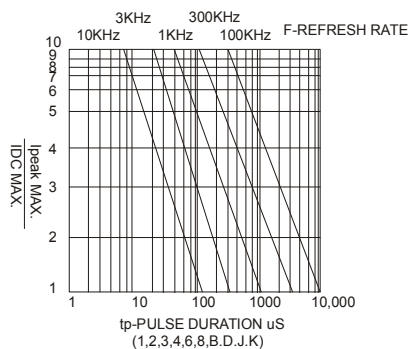

NOTE: 25°C free air temperature unless otherwise specified

Round Type , Blinking LED lamp

BL-L314-B-S3

■ Packing and weighting

