

Round Type, Blinking LED lamp

BL-L314UYW-B-S3

Features:

- 3mm Round Blinking (flash) LED Lamps, candle random blinking
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens are available.
- IC compatible /Low current capability.
- RoHs Compliance



■ Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2(deg)
	Emitted Color	Material	λP (nm)		Typ	Max	Min.	Typ.	
					BL-L314URW-B-S3	Ultra Red	AlGaAs,DDH	660	
BL-L314UEW-B-S3	Ultra Orange	AlGaInP	630	2.10	2.50	100	200		
BL-L314UGW-B-S3	Ultra Green	AlGaInP	574	2.20	2.50	80	150		
BL-L314UYW-B-S3	Ultra Yellow	AlGaInP	590	2.10	2.50	80	150		


■ Absolute maximum ratings (Ta=25°C)

Parameter	UR	UE	UY	UG	Unit
Forward Current I _F	25	30	30	30	mA
Power Dissipation P _d	60	65	65	75	mW
Reverse Voltage V _R	5	5	5	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	150	150	150	150	mA
Operation Temperature T _{OPR}	-40 to +80				°C
Storage Temperature T _{STG}	-40 to +85				°C
Lead Soldering Temperature TSOL	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)				°C

Round Type, Blinking LED lamp

BL-L314UYW-B-S3

■ Package configuration & Internal circuit diagram

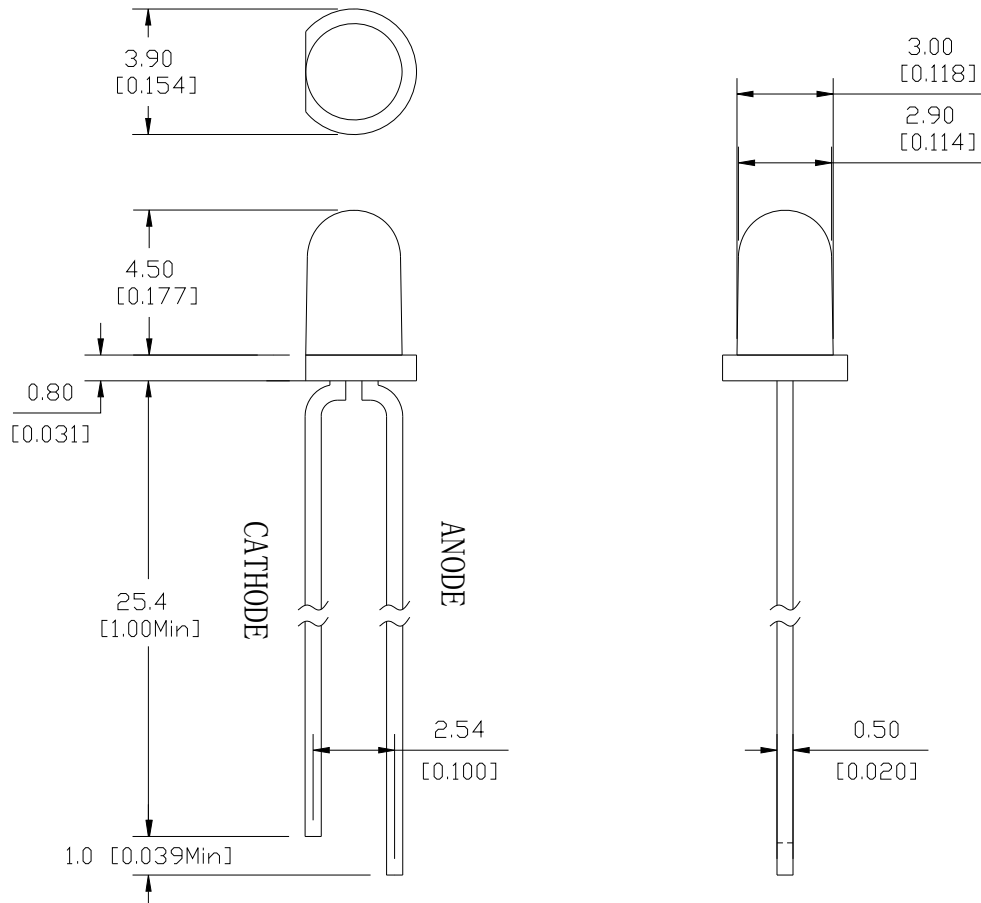


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


Round Type, Blinking LED lamp

BL-L314UYW-B-S3


Typical electrical-optical characteristics curves:

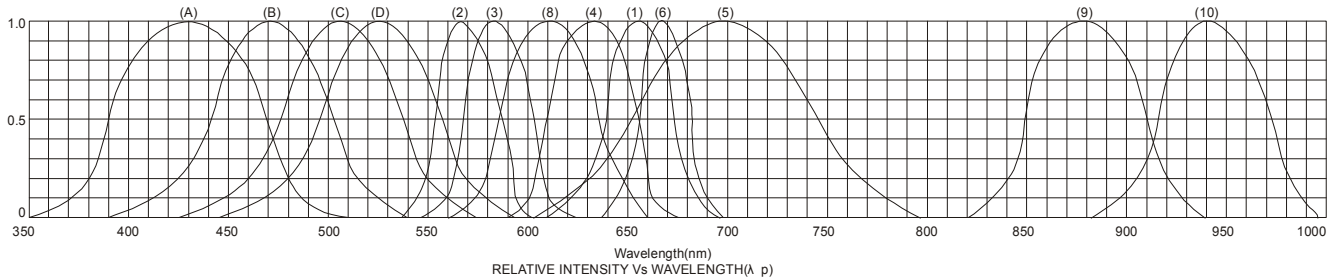


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaN/SiC 525nm/Ultra Green




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

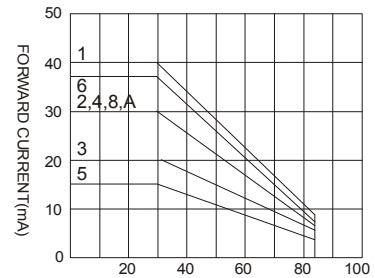

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

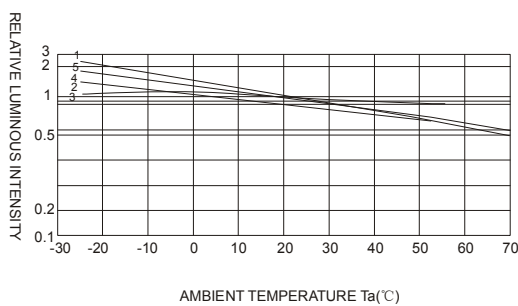

AMBIENT TEMPERATURE Ta(°C)

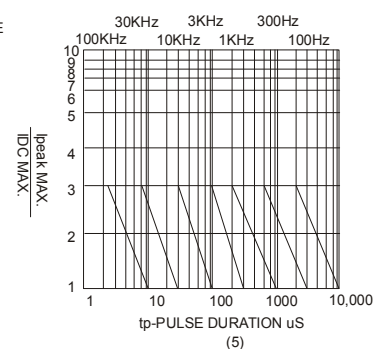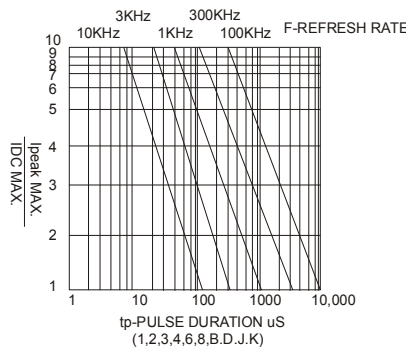

NOTE:25°C free air temperature unless otherwise specified

Round Type, Blinking LED lamp

BL-L314UYW-B-S3

■ Packing and weighting

